




Lead Screw

Linear actuation for positioning tasks
PRECiStep® Technology

For combination with
Stepper Motors: ADM0620, AM0820, AM1020

Series M1,6 x 0,35 x L1

Nominal diameter	1,6	mm
Diameter over the flanks (min./max.)	1,310 / 1,353	mm
Pitch	0,35	mm
Precision (per pitch)	< 0,5	µm
Material	316L	

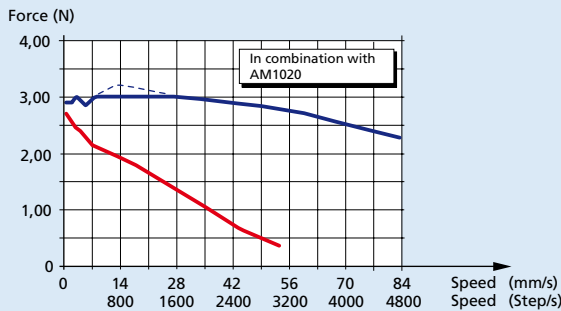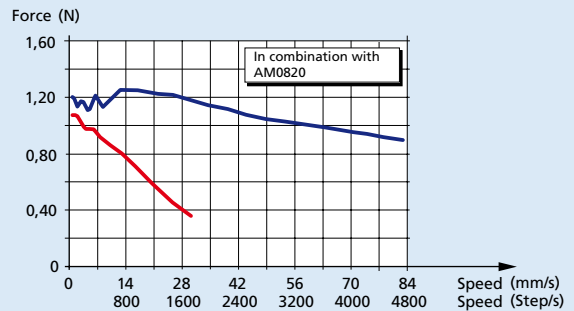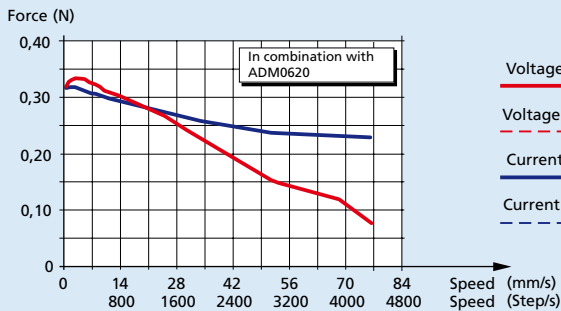

Note: the thrust curves include already a safety factor for the use of the stepper motor.

Ordering information	L1 (mm) =	7,5	15	25	Custom
Order code (no bearing tip)		M1,6x0,35x7,5	M1,6x0,35x15	-	M1,6x0,35xL1*
Order code (with bearing tip)		-	M1,6x0,35x15T	M1,6x0,35x25T	M1,6x0,35xL1*T

* For custom length, please inquire with your point of sales

