





Lead Screw

Linear actuation for positioning tasks
PRECiStep® Technology

For combination with
Stepper Motors: AM0820, AM1020, ADM1220,
ADM1220S, AM1524

Series M2 x 0,2 x L1

Nominal diameter	2,0	mm
Diameter over the flanks (min./max.)	1,83 / 1,85	mm
Pitch	0,2	mm
Precision (per pitch)	< 0,5	µm
Material	316L	

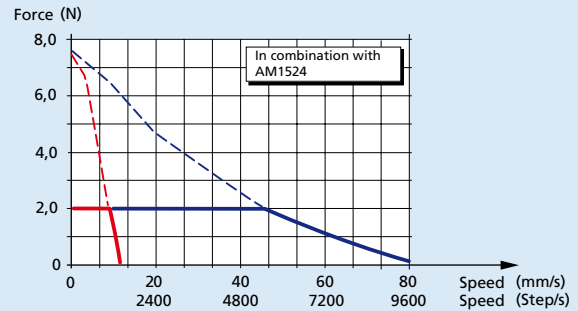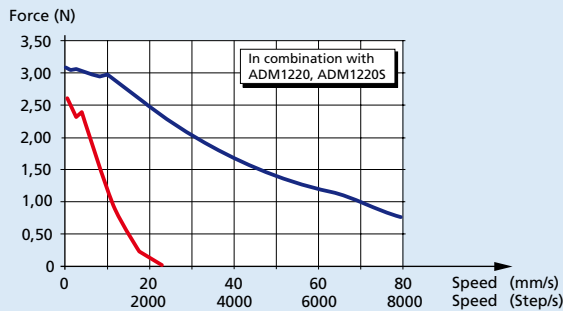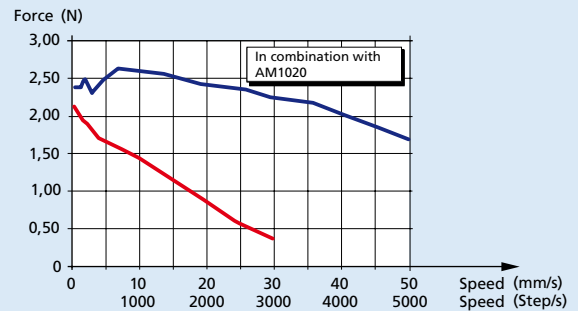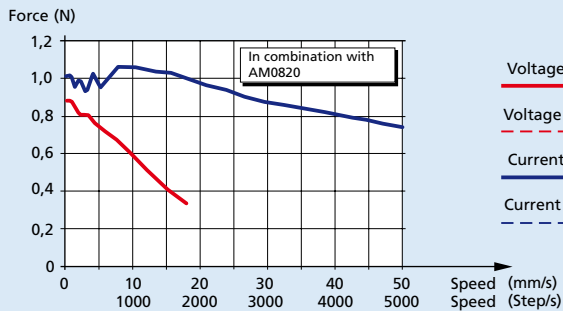

Note: the thrust curves include already a safety factor for the use of the stepper motor.

Ordering information	L1 (mm) =	7,5	15	25	Custom
Order code (no bearing tip)		M2x0,2x7,5	M2x0,2x15	M2x0,2x25	M2x0,2xL1*
Order code (with bearing tip)		-	M2x0,2x15T	M2x0,2x25T	M2x0,2xL1*T

* For custom length, please inquire with your point of sales

