





Lead Screw

Linear actuation for positioning tasks
PRECiStep® Technology

For combination with
Stepper Motors: AM0820, AM1020, ADM1220,
ADM1220S, AM1524

Series M2,5 x 0,25 x L1

Nominal diameter	2,5	mm
Diameter over the flanks (min./max.)	2,298 / 2,318	mm
Pitch	0,25	mm
Precision (per pitch)	< 0,5	µm
Material	316L	

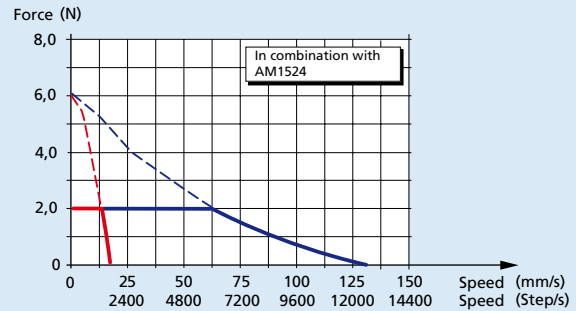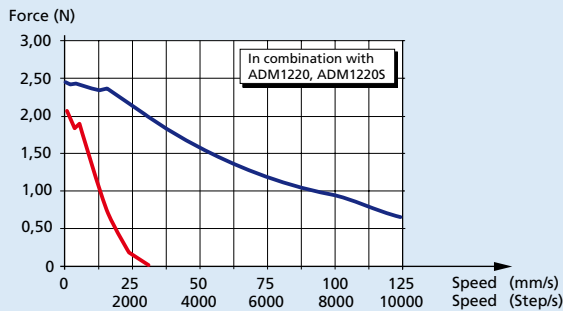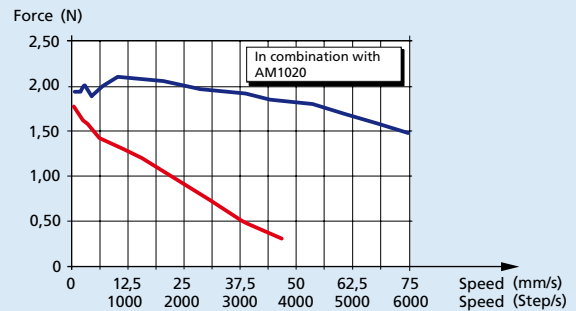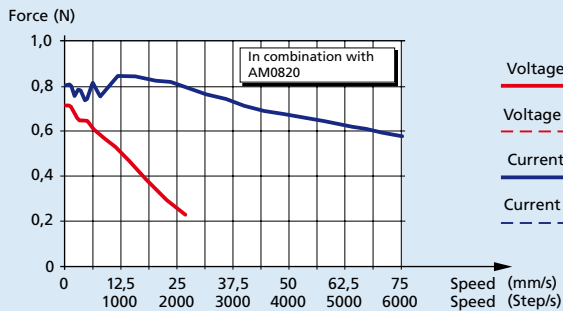

Note: the thrust curves include already a safety factor for the use of the stepper motor.

Ordering information	L1 (mm) =	7,5	15	25	Custom
Order code (no bearing tip)		M2,5x0,25x7,5	M2,5x0,25x15	M2,5x0,25x25	M2,5x0,25xL1*
Order code (with bearing tip)		-	M2,5x0,25x15T	M2,5x0,25x25T	M2,5x0,25xL1*T

* For custom length, please inquire with your point of sales

